



XYLOR 1600 SK



XYLOR 1600 SK with option swinging coupling hitch



Rabaud advantages

- Can be mounted onto skid steer loaders from 50 HP up to 90 HP. Universal fixed coupling (SAE J2513).
- Helical rotor with a set of mobile hammers and counterhammers fitted in « U » shape for the best crushing.
- Cast-iron gear hydraulic motor with drain line.
- HBC system (Hydraulic Block Control) allowing the hydraulic flow regulation, limits the pressure and allows rotor progressive braking.
- Side drive by belts.
- Casing for the hydraulic motor.
- Rear roller-heel adjustable in height Ø 165 mm.
- Support pads with interchangeable and anti-wear material.
- Front protection with chains to prevent projections.



Technical characteristics



MODELS	XYLOR 1300 SK	XYLOR 1400 SK	XYLOR 1600 SK	XYLOR 1800 SK	XYLOR 2000 SK
Skid steer loader power	From 50 HP up to 90 HP				
Rotor type	Mobile hammers				
Number of hammers	14		16	20	22
Counter-hammer line	1 line				
Crushing width	1300 mm	1400 mm	1600 mm	1800 mm	2000 mm
Average grinding Ø	50 - 60 mm				
Helical rotor	Yes				
Rotor Ø (without/with tools)	140 / 400 mm				
Size of gear motor	31 cm ³		41 cm ³		56 cm ³
Drain line	Yes				
Drive	3 belts				
Oil flow	65 L/min recommended 150 L/min maxi.		90 L/min recommended 150 L/min maxi.		110 L/min recommended 240 L/min maxi.
Maximum pressure	200 bar		220 bar		
Dimensions (L X W x H) with swinging hitch	1,37 x 1,49 x 0,77 m	1,37 x 1,69 x 0,77 m	1,37 x 1,89 x 0,77 m	1,37 x 2,09 x 0,77 m	1,37 x 2,29 x 0,77 m
Weight	650 kg	665 kg	690 kg	745 kg	790 kg

Standard equipment

- One set of counter-hammers fitted in « U ».
- HBC system (Hydraulic Block Control).
- Rear roller-feel adjustable in height Ø 165 mm.
- Front protection with chains to prevent projections.
- Universal fixed coupling for compact loader (SAE J2513).
- Hydraulic hose, without coupler, with protective casing (3 m).



	£	Reference
MODELS		
XYLOR 1300 SK with mobile hammers	7,815	79146A
XYLOR 1400 SK with mobile hammers	8,040	79147A
XYLOR 1600 SK with mobile hammers	8,615	79148A
XYLOR 1800 SK with mobile hammers	8,785	79149A
XYLOR 2000 SK with mobile hammers	9,265	79150A
OPTIONS		
Swinging hitch	1,040	79151A
Hydraulic sideshift +/- 200 mm (additional dual-effect valve needed)	380	79152A
Electro-hydraulic control - via in-cab control unit	1,720	79185A
SPARE PARTS		
Kit hammer + screw + nut – unit price 	35	79156A
Kit knife + screw + nut – unit price 	30	79118A

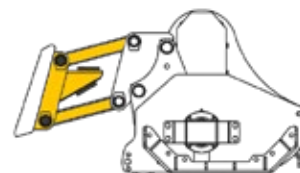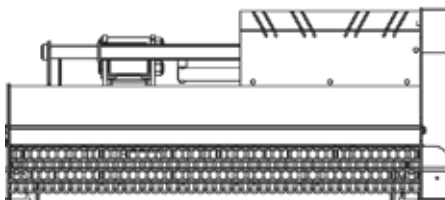

Option swinging coupling hitch